SKYLINE
SKY-LITES

CIRCULAR FLAT INSULATED CURB DOUBLE GLAZED

CFICD

SCALE 6" = 1'

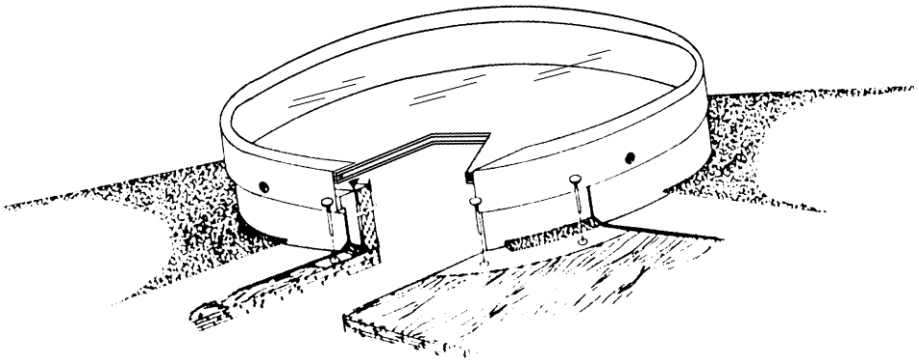

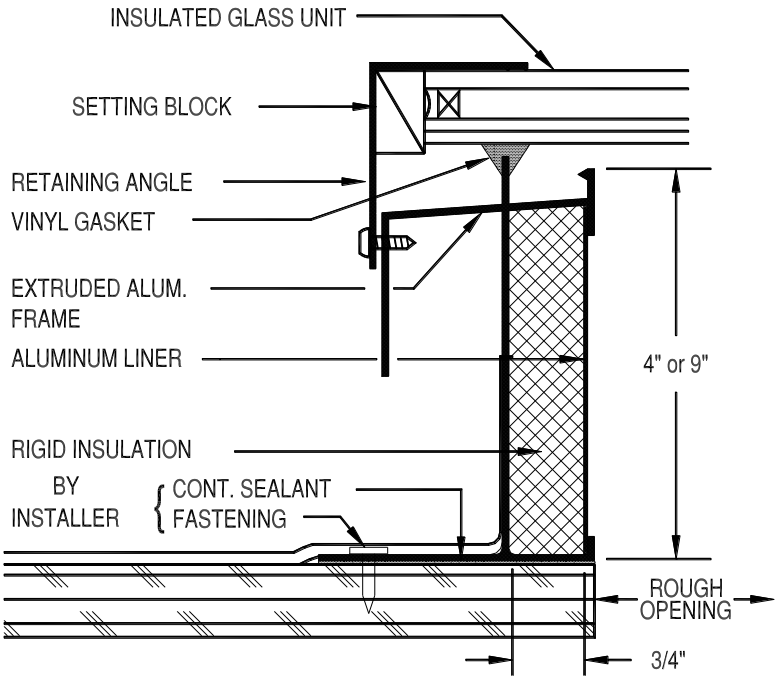

NOTE: Model CFICD skylights are designed for use on a minimum pitch of 3 in 12.

CIRCLE THE SIZE DESIRED.

MODEL CFICD	NOMINAL SIZES IN FEET	R/O INSIDE FRAME DIAMETER
48	4	43"
60	5	54"
72	6	67"

SPECIFICATIONS

COMPLETE THE BLANKS BELOW WITH YOUR DESIRED SPECIFICATIONS.

Skylights shall be self-flashing as manufactured by SKYLINE SKY-LITES, 2925 Delta Drive, Colorado Springs, CO 80910, (866)625-1330. Skylights shall be model CFICD glazed with a dual pane insulated glass, clear tempered with low E outer lite over a clear laminated inner lite. Self-flashing insulated curb frame shall be [4" / 9"] ___" tall exterior wall, 3/4" thick rigid insulation and an .025" aluminum well liner to match frame finish. Mounting flange to be 2" wide. Skylight frame shall be of 6063-T5 aluminum with a .070" thick base frame and a .062" thick retaining angle. Frame finish shall be [bronze anodized / clear anodized / natural aluminum (mill)] _____. Vinyl gasket shall be used between the frame and the glazing to form a tight seal. Weep holes shall be provided in the frame. Skylight shall be completely assembled by the manufacturer and ready for installation by others.

I hereby certify that all quantities, dimensions and conditions shown on this drawing are correct as shown or as corrected.

_____ _____

SIGNATURE DATE

REPRESENTING _____

PROJECT: _____

CUSTOMER: _____

CONTRACTOR: _____

QUAN/MODEL: _____

_____

2925 Delta Drive
Colorado Springs, CO 80910-1012
skylites.com

(719) 392-4220
(866) 625-1330
Fax: (719) 392-4685