SKYLINE
SKY-LITES

DOME
INSULATED CURB
DOUBLE GLAZED

DICD

SCALE 6" = 1'

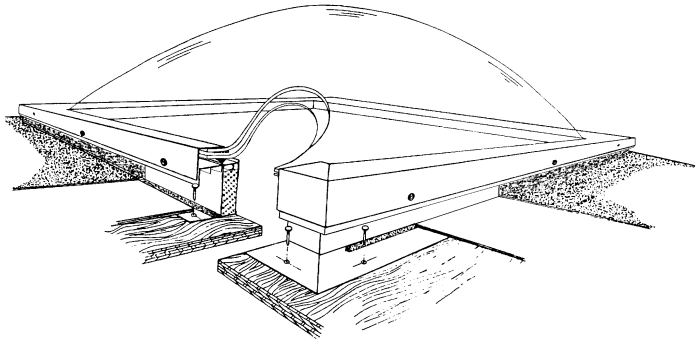

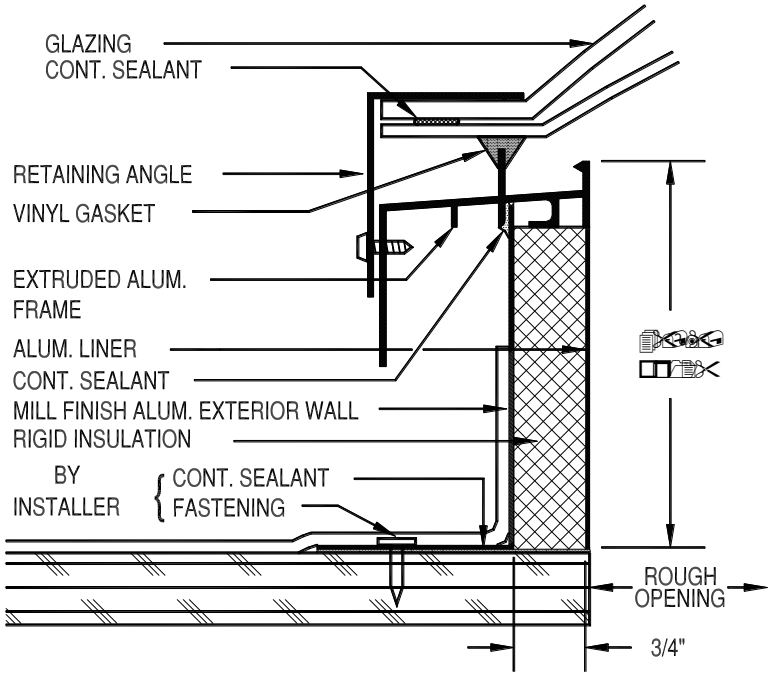

MODEL DICD	ROUGH OPENINGS
2028	14 1/2 x 22 1/2
2052	14 1/2 x 46 1/2
2828	22 1/2 x 22 1/2
2841	22 1/2 x 35 1/4
2852	22 1/2 x 46 1/2
2876	22 1/2 x 69 3/4
2896	22 1/2 x 89 3/4
3636	30 1/2 x 30 1/2
3652	30 1/2 x 46 1/2
3660	30 1/2 x 55 1/4
3676	30 1/2 x 69 3/4
3696	30 1/2 x 89 3/4
4242	37 1/4 x 37 1/4
5252	46 1/2 x 46 1/2
5276	46 1/2 x 69 3/4
5296	46 1/2 x 89 3/4
6060	55 1/4 x 55 1/4
7676	69 3/4 x 69 3/4
7696	69 3/4 x 89 3/4
8080	75 1/4 x 75 1/4
9898	92 3/4 x 92 3/4

CUSTOM SIZES
are available upon request.

SPECIFICATIONS

COMPLETE THE BLANKS BELOW WITH YOUR DESIRED SPECIFICATIONS.

Skylights shall be self-flashing as manufactured by SKYLINE SKY-LITES, 2925 Delta Drive, Colorado Springs, CO 80910, (866)625-1330. Skylights shall be model DICD with thermally formed dual acrylic glazings, [bronze / clear] _____ outer dome over [clear / white] _____ inner dome. Self-flashing insulated curb frame shall be [4" / 9" / 12"] ___" tall fabricated from .040 mill finish aluminum exterior wall, 3/4" thick rigid insulation and an .025" aluminum well liner to match frame finish. Mounting flange to be 2" wide. Skylight frame shall be of 6063-T5 aluminum with a .070" thick base frame and a .062" thick retaining angle. Frame finish shall be [bronze anodized / clear anodized / natural aluminum (mill)] _____. All corners shall be welded. Vinyl gasket shall be used between the frame and the glazing to form a tight seal. A continuous silicone sealant shall be used between glazings. Weep holes shall be provided in the frame. Skylight shall be completely assembled by the manufacturer and ready for installation directly to sheathing by others.

I hereby certify that all quantities, dimensions and conditions shown on this drawing are correct as shown or as corrected.

_____ _____
SIGNATURE DATE
REPRESENTING _____

PROJECT: _____
CUSTOMER: _____
CONTRACTOR: _____
QUAN/MODEL: _____
_____

2925 Delta Drive
Colorado Springs, CO 80910-1012
skylites.com

(719) 392-4220
(866)625-1330
Fax: (719) 392-4685