SKYLINE
SKY-LITES

FLAT INSULATED CURB DOUBLE GLAZED

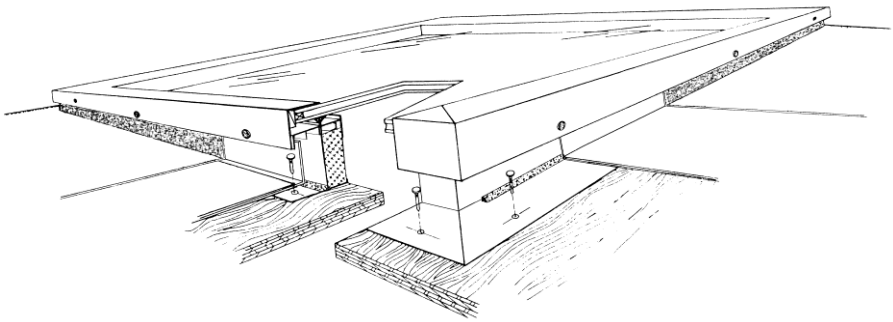

FICD

SCALE 6" = 1'

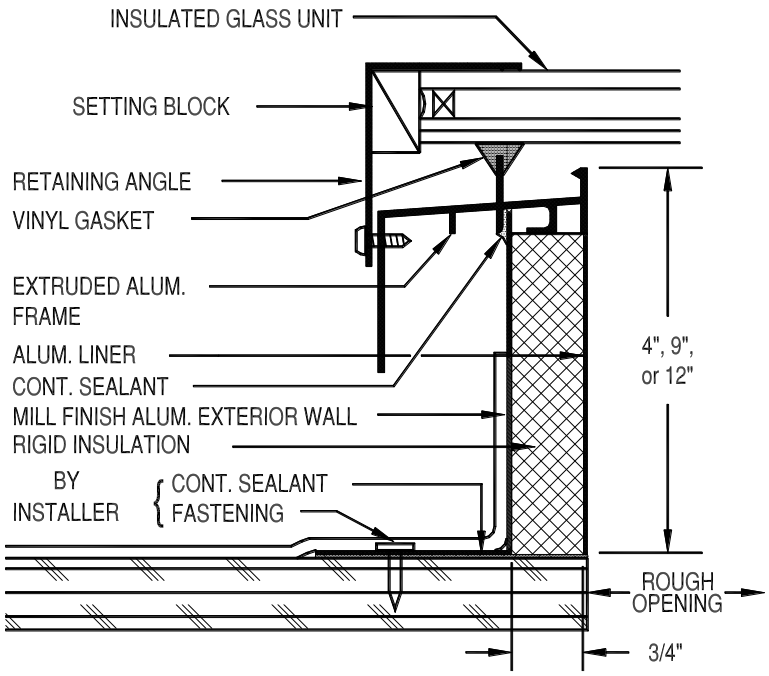

NOTE: Model FICD skylights are designed for use on a minimum pitch of 3 in 12.

CIRCLE THE SIZE DESIRED.

MODEL FICD	ROUGH OPENINGS
2028	14 1/2 x 22 1/2
2052	14 1/2 x 46 1/2
2828	22 1/2 x 22 1/2
2841	22 1/2 x 35 1/4
2852	22 1/2 x 46 1/2
2876	22 1/2 x 69 3/4
2896	22 1/2 x 89 3/4
3636	30 1/2 x 30 1/2
3652	30 1/2 x 46 1/2
3660	30 1/2 x 55 1/4
3676	30 1/2 x 69 3/4
3696	30 1/2 x 89 3/4
4242	37 1/4 x 37 1/4
5252	46 1/2 x 46 1/2
5276	46 1/2 x 69 3/4
5296	46 1/2 x 89 3/4
6060	55 1/4 x 55 1/4

CUSTOM SIZES
are available upon request.

SPECIFICATIONS

COMPLETE THE BLANKS BELOW WITH YOUR DESIRED SPECIFICATIONS.

Skylights shall be self flashing as manufactured by SKYLINE SKY-LITES, 2925 Delta Drive, Colorado Springs, CO 80910, (866)625-1330. Skylights shall be model FICD glazed with a dual pane insulating glass, clear tempered with low E outer lite over a clear laminated inner lite. Self-flashing insulated curb frame shall be [4" / 9" / 12"] ___" tall fabricated from .040" mill finish aluminum exterior wall, 3/4" thick rigid insulation and an .025" aluminum well liner to match frame finish. Mounting flange to be 2" wide. Skylight frame shall be of 6063-T5 aluminum with a .070" thick base frame and a .062" thick retaining angle. Frame finish shall be [bronze anodized / clear anodized / natural aluminum (mill)] _____. All corners shall be welded. Vinyl gasket shall be used between the frame and the glazing to form a tight seal. Weep holes shall be provided in the frame. Skylight shall be completely assembled by the manufacturer and ready for installation directly to sheathing by others.

I hereby certify that all quantities, dimensions and conditions shown on this drawing are correct as shown or as corrected.

_____ _____
SIGNATURE DATE
REPRESENTING _____

PROJECT: _____
CUSTOMER: _____
CONTRACTOR: _____
QUAN/MODEL: _____
_____

2925 Delta Drive
Colorado Springs, CO 80910-1012
skylites.com

(719) 392-4220
(866) 625-1330
Fax: (719) 392-4685